

SPECIAL MEETING

1. Time & Place
2. Members Present
3. Open Quotes for Traffic Signal Installation at Fresh Thyme Farmer's Market 505 W. McGalliard Road
4. Adjournment

BOARD OF PUBLIC WORKS AND SAFETY
CITY OF MUNCIE, STATE OF INDIANA
NOVEMBER 22nd, 2017 MINUTES

1. Board of Public Works and Safety, City of Muncie, State of Indiana, met in the City Hall Auditorium, at 9:00 A.M.
2. **Members Present:** John Quirk, Roger Overbey, **Bobbie Clemens (Absent)**
3. **Open Quotes for Traffic Signal Installation at Fresh Thyme Farmer's Market 505 W. McGalliard Road:** Quotes were opened from:

James Drew Corp.
8701 Zionsville Road
Indianapolis, IN 46268-0935
\$111,325.20

Morphey Construction Inc.
1499 North Sherman Dr.
Indianapolis, IN 46201-1515
\$115,319.20

Duke Campbell and Dick Weigel requested a few minutes to review bids and possibly award quote. Dick Weigel, HWC Engineering came forward and informed President Quirk that we requested quotes from three signal companies and that he had received an email from Shambaugh & Sons that they would not be submitting a quote. Dick Weigel, HWC Engineering recommended the board to accept quote from James Drew Corp in the amount of \$111,325.20 President Quirk entertained a motion to accept the lowest bid. Roger Overbey moved to accept quote from James Drew Corporation as recommended by Dick Weigel. John Quirk provided the second. Motion passed by voice vote. (See bid tabulation on Page #154)

4. **Adjournment:** President Quirk entertained a motion to adjourn. Roger Overbey moved to adjourn meeting, meeting adjourned 09:10 a.m. John Quirk provided the second. Motion passed by voice vote.

Board of Public Works and Safety

John Quirk, President

Roger Overbey, Vice-President


Bobbie Clemens, Secretary

Linda Hayes, Recording Secretary

BOARD OF PUBLIC WORKS AND SAFETY
MUNCIE, INDIANA

Muncie Fresh Thyme Market and McCalliard Road Traffic Signal Bid Summary
Bids opened on November 22, 2017

ITEM NO.	ITEM NAME:	UNIT	QUANTITY	Engineer's Estimate		Morphey Construction		James H. Drew Corp.		
				Unit Cost	Total Cost	Unit Cost	Total Cost	Unit Cost	Total Cost	
1	105-06845	CONSTRUCTION ENGINEERING	LS	1	2,000.00	2,000.00	750.00	750.00	2,100.00	2,100.00
2	110-01001	MOBILIZATION AND DEMOBILIZATION	LS	1	4,000.00	4,000.00	3,000.00	3,000.00	1,837.00	1,837.00
3	805-02150	PEDESTRIAN SIGNAL HEAD, COUNTDOWN, 18 IN.	EACH	4	550.00	2,200.00	675.00	2,700.00	491.00	1,964.00
4	805-02065	SIGNAL POLE FOUNDATION, 36 IN. X 36 IN. X 84 IN.	EACH	4	2,500.00	10,000.00	2,800.00	11,200.00	3,040.00	12,160.00
5	805-02445	CONTROLLER AND CABINET, P1	EACH	1	18,000.00	18,000.00	19,500.00	19,500.00	20,001.00	20,001.00
6	805-08464	RADIO INTERCONNECT	EACH	2	2,000.00	4,000.00	1,400.00	2,800.00	1,697.00	3,394.00
7	805-08493	RADIO INTERCONNECTION SYSTEM TESTING	LS	1	750.00	750.00	850.00	850.00	1,096.00	1,096.00
8	805-11570	RADIO ANTENNA	EACH	2	700.00	1,400.00	900.00	1,800.00	833.00	1,666.00
9	805-11744	HANDHOLE SIGNAL TYPE 2	EACH	5	750.00	3,750.00	800.00	4,000.00	756.00	3,780.00
10	805-11813	CONDUIT, PVC, 2 IN. SCHEDULE 80	LFT	682	15.00	10,230.00	17.00	11,594.00	18.50	12,617.00
11	805-78205	TRAFFIC SIGNAL HEAD, 3 SECTION, 12 IN.	EACH	7	700.00	4,900.00	750.00	5,250.00	692.00	4,844.00
12	805-78230	TRAFFIC SIGNAL HEAD, 5 SECTION, 12 IN.	EACH	3	1,200.00	3,600.00	1,500.00	4,500.00	1,129.00	3,387.00
13	805-78370	PEDESTRIAN PUSH BUTTON, NON-APS	EACH	4	375.00	1,500.00	450.00	1,800.00	365.00	1,460.00
14	805-78470	SIGNAL CABLE, ROADWAY LOOP, COPPER, 1C/14 GA	LFT	1381	0.50	690.50	0.22	303.82	0.60	828.60
15	805-78480	SIGNAL CABLE, CONTROL, COPPER, 3C/14 GA	LFT	370	1.50	555.00	1.60	592.00	1.30	481.00
16	805-78485	SIGNAL CABLE, CONTROL, COPPER, 5C/14 GA	LFT	334	1.80	601.20	1.80	601.20	1.40	467.60
17	805-78490	SIGNAL CABLE, CONTROL, COPPER, 7C/14 GA	LFT	239	2.00	478.00	2.00	478.00	1.50	358.50
18	805-78495	SIGNAL CABLE, CONTROL, COPPER, 9C/14 GA	LFT	153	2.05	313.65	2.30	351.90	1.80	275.40
19	805-78510	SIGNAL CABLE, DETECTOR LEAD-IN, COPPER, 2C/16 GA	LFT	718	2.10	1,507.80	1.50	1,077.00	0.95	682.10
20	805-78785	SIGNAL DETECTOR HOUSING	EACH	5	775.00	3,875.00	1,100.00	5,500.00	876.00	4,380.00
21	805-78795	SAW CUT FOR ROADWAY LOOP DETECTOR AND SEALANT	LFT	590	8.00	4,720.00	9.00	5,310.00	9.00	5,310.00
22	805-78925	CONTROLLER CABINET FOUNDATION, P1	EACH	1	1,200.00	1,200.00	1,600.00	1,600.00	1,041.00	1,041.00
23	805-81032	SIGNAL STRAIN POLE STEEL 30 FT	EACH	4	4,500.00	18,000.00	4,400.00	17,600.00	4,178.00	16,712.00
24	808-03439	TRANSVERSE MARKING, THERMOPLASTIC, CROSSWALK LINE, WHITE, 24 IN.	LFT	184	6.50	1,196.00	8.10	1,490.40	8.00	1,472.00
25	808-06703	LINE, THERMOPLASTIC, SOLID, WHITE, 4 IN.	LFT	185	1.20	222.00	1.10	203.50	1.00	185.00
26	808-06716	LINE, REMOVE	LFT	315	0.85	267.75	2.00	630.00	1.80	567.00
27	808-75245	LINE, THERMOPLASTIC, SOLID, YELLOW, 4 IN.	LFT	1113	1.00	1,113.00	1.10	1,224.30	1.00	1,113.00
28	808-75297	TRANSVERSE MARKING, THERMOPLASTIC, STOP LINE, WHITE, 24 IN.	LFT	201	8.00	1,608.00	8.10	1,628.10	8.00	1,608.00
29	808-75320	PAVEMENT MESSAGE MARKING, THERMOPLASTIC LANE INDICATION ARROW	EACH	2	112.00	224.00	130.00	260.00	126.00	252.00
30	808-75325	PAVEMENT MESSAGE MARKING, THERMOPLASTIC ONLY	EACH	1	130.00	130.00	175.00	175.00	168.00	168.00
31	802-07060	SIGN, SHEET, RELOCATE	EACH	1	250.00	250.00	350.00	350.00	198.00	198.00
32	801-06775	MAINTENANCE OF TRAFFIC	LSUM	1	4,000.00	4,000.00	4,200.00	4,200.00	3,816.00	3,816.00
33	805-78420	DISCONNECT HANGER	EACH	4	500.00	2,000.00	500.00	2,000.00	276.00	1,104.00
		TOTAL				\$109,281.90		\$115,319.22		\$111,325.20

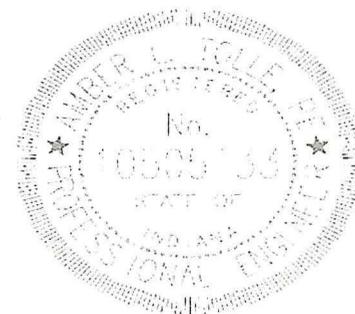

Amber L. Tolle